


Pixel Drive v3


Excellent full-range
Marshall-style grunt




Before you dig in, ensure you download and read the **General Build Guide**.

It contains all the information you need for a successful outcome.

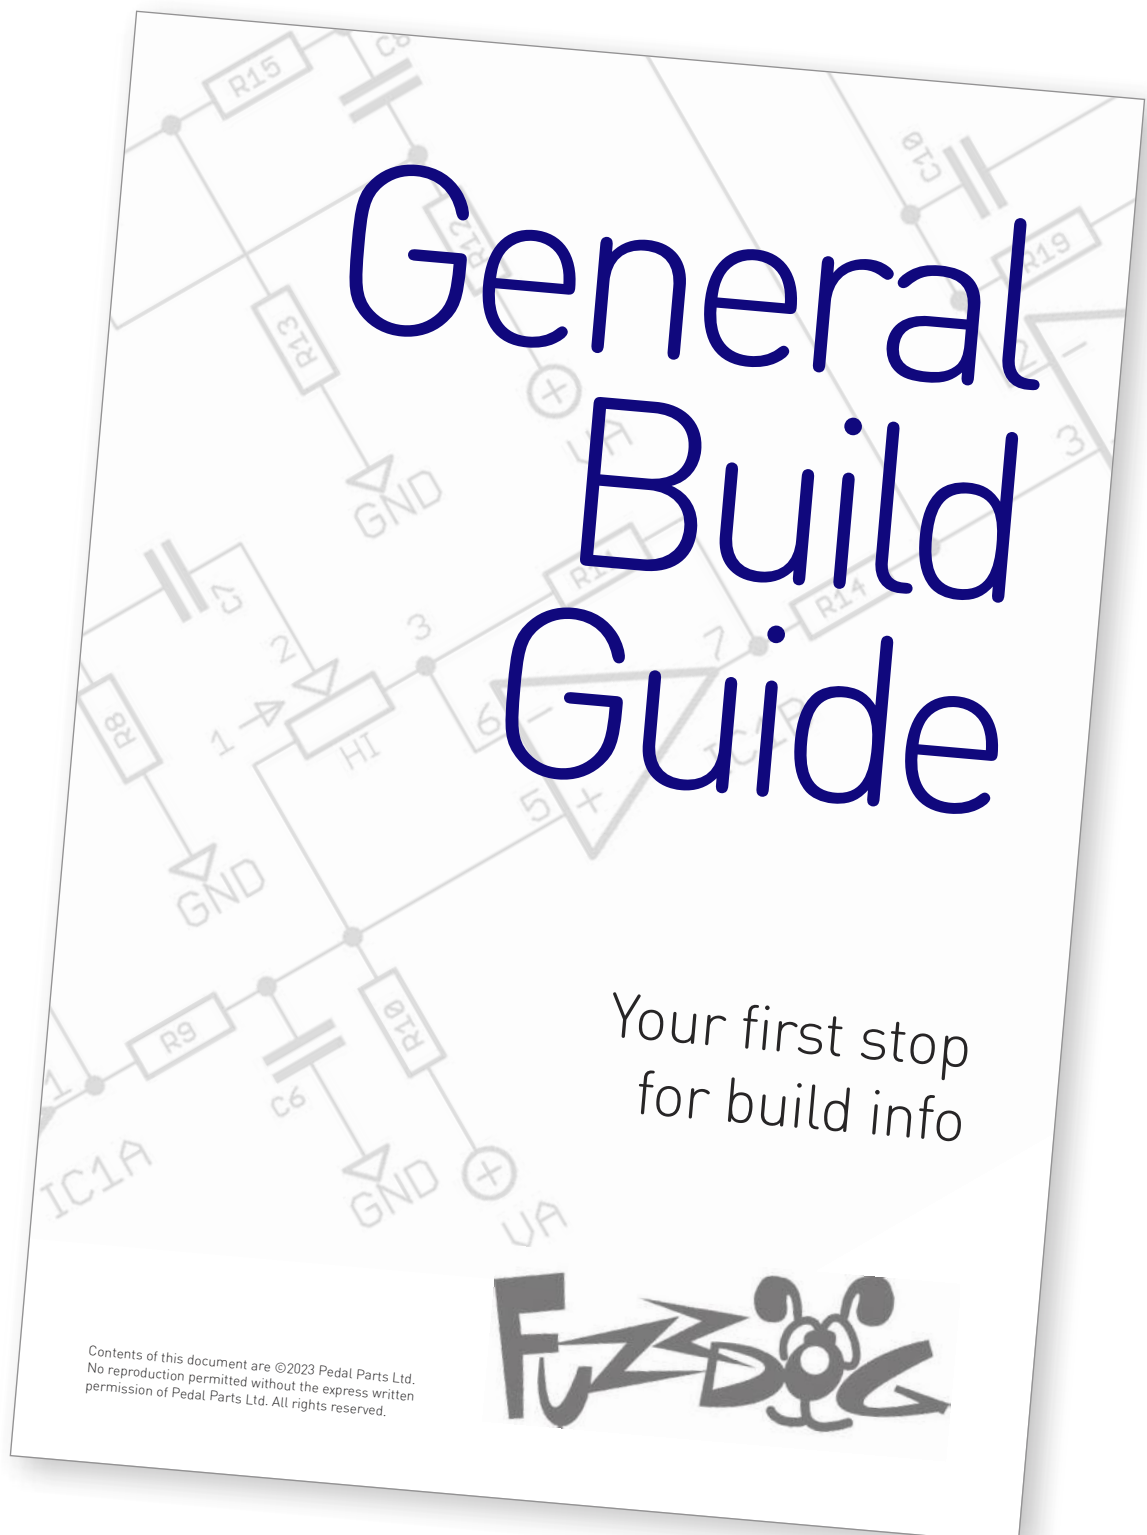

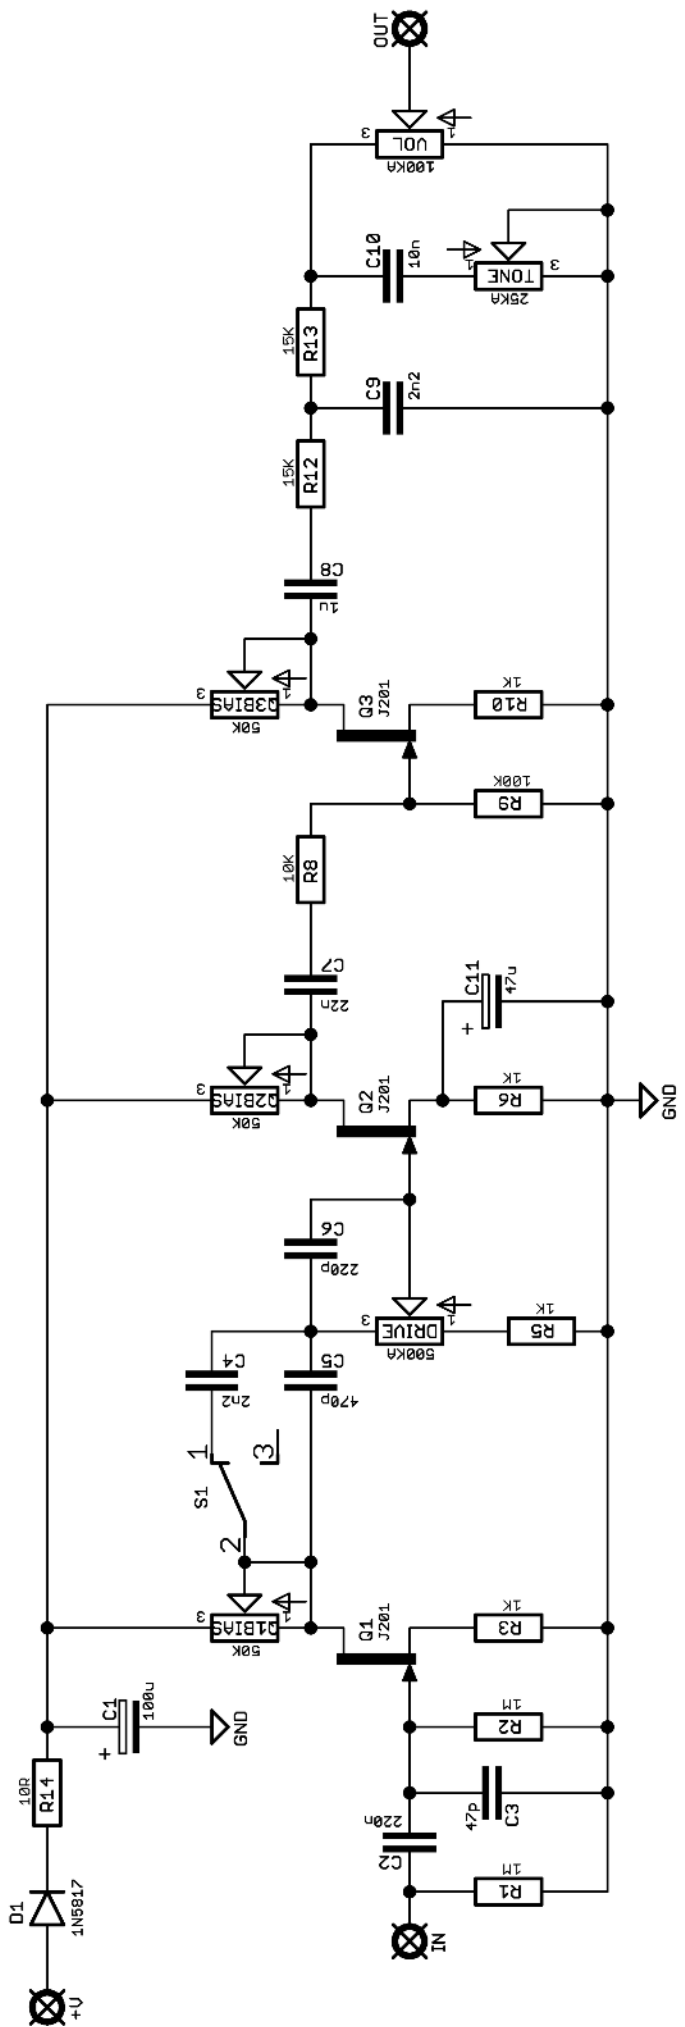

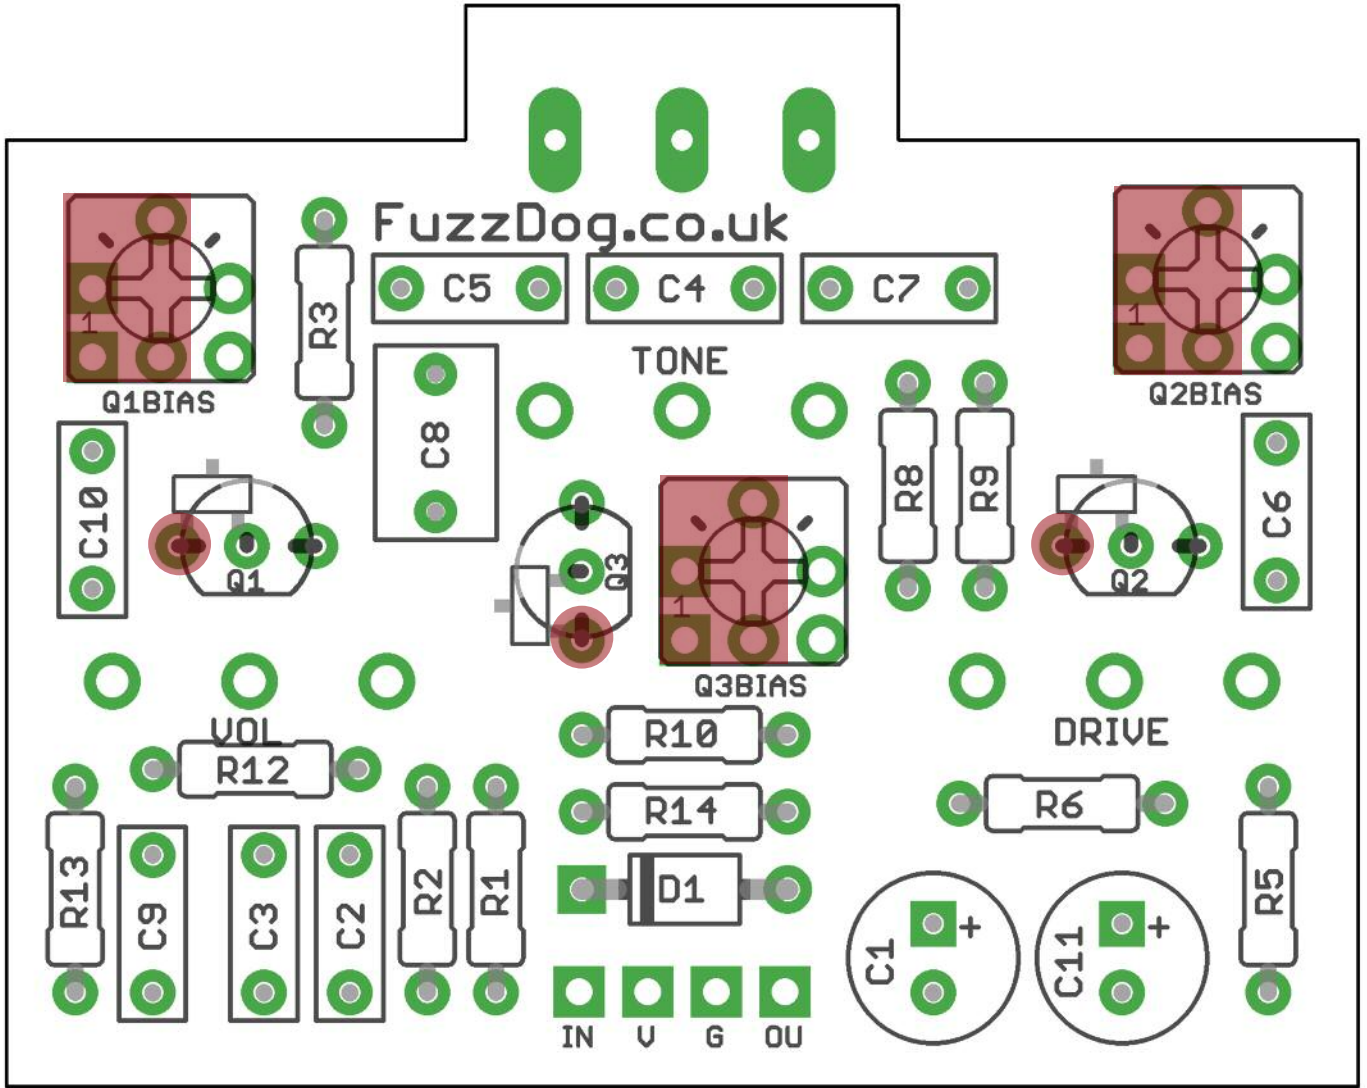

Snap the small metal tag off the pots so they can be mounted flush in the box.

You should solder all other board-mounted components before you solder the pots.

Once they're in place you'll have no access to much of the board.

BIASING

Grab your meter and measure your supply voltage on D1 as marked above in blue.

Adjust each trimmer for around half this voltage on each of the FETs. Use either the FET pin or the leg of the trimmer, the latter probably being easier to access.

BASS BOOST MODE

This is engaged with the toggle switch to the right.

Drilling template


Hammond 1590B - 60 x 111 x 31mm

Drill sizes listed are minimum.

It's a good idea to add 1mm to anything mounted on the PCB that'll poke through the front of the enclosure.

Drill sizes:

Pots	7mm
Jacks	10mm
Footswitch	12mm
DC Socket	12mm
Toggle switches	6mm
Rotary switches	10mm

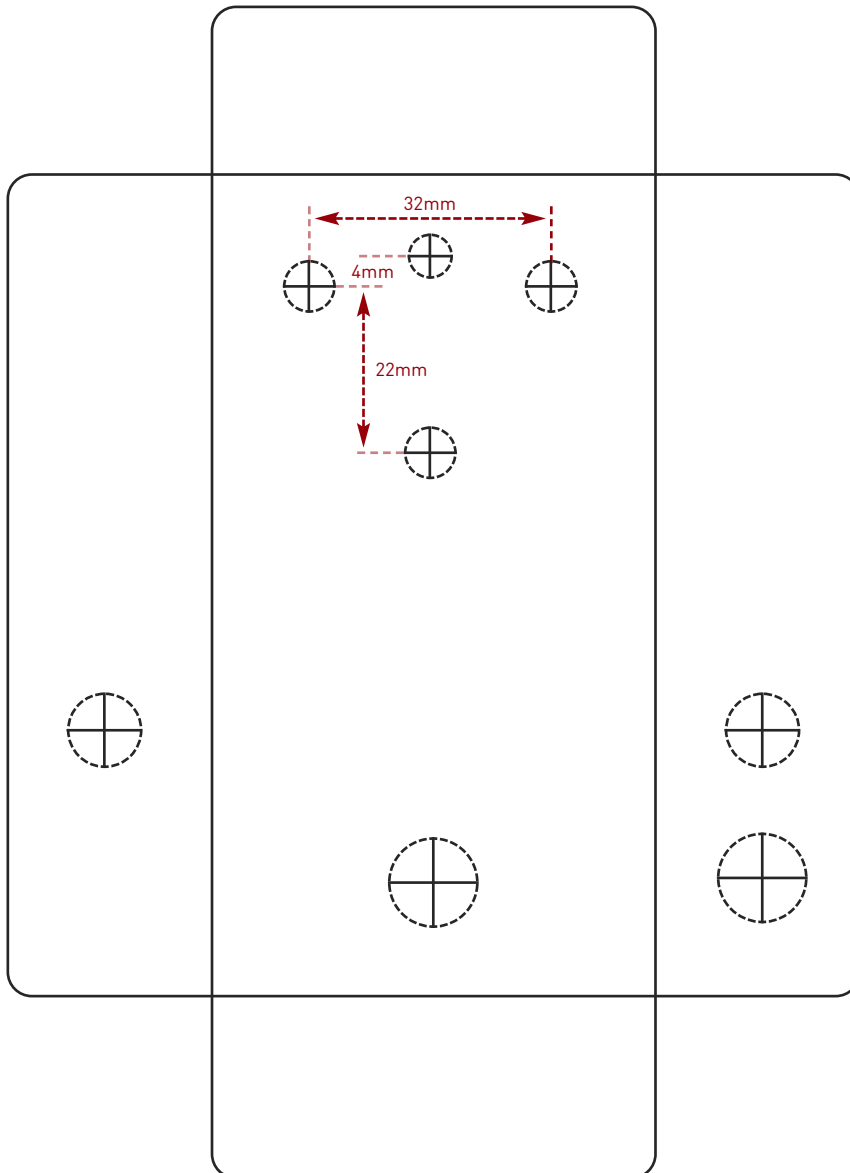

This template is a rough guide only. You should ensure correct marking of your enclosure before drilling. You use this template at your own risk.

Pedal Parts Ltd can accept no responsibility for incorrect drilling of enclosures.

FuzzDog.co.uk