


Dual K-Buff

In, out... in, out...




Before you dig in, ensure you download and read the **General Build Guide**.


It contains all the information you need for a successful outcome.

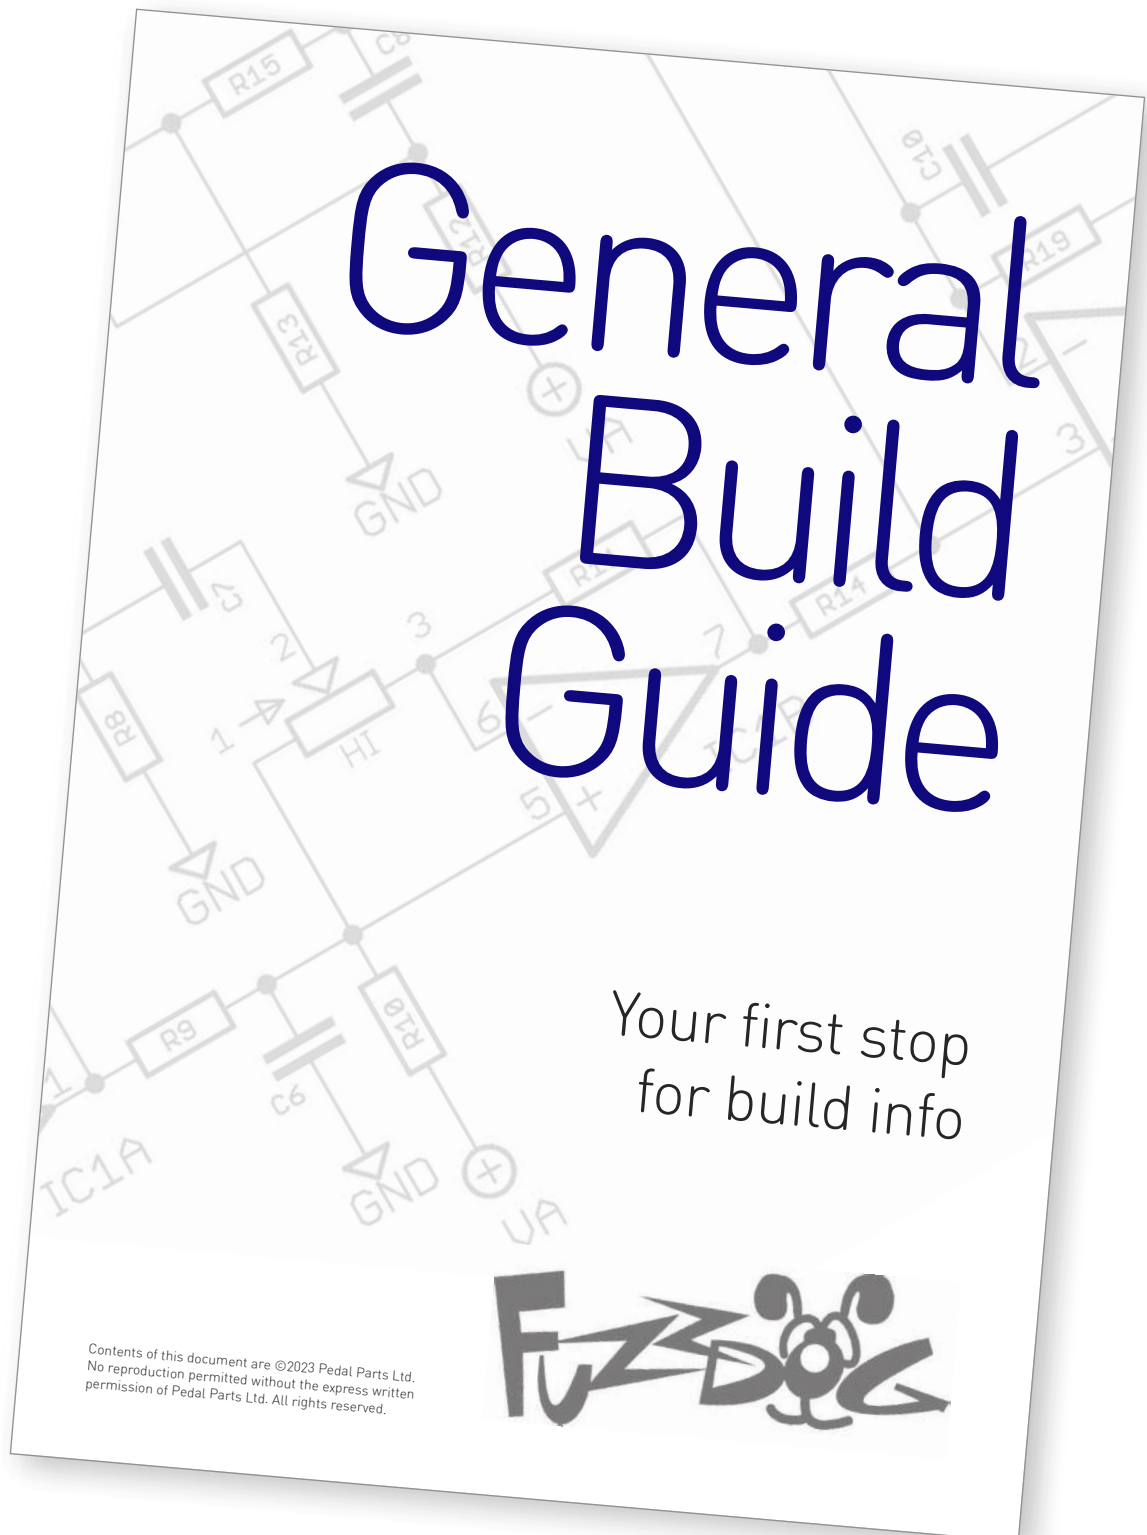



Schematic + BOM

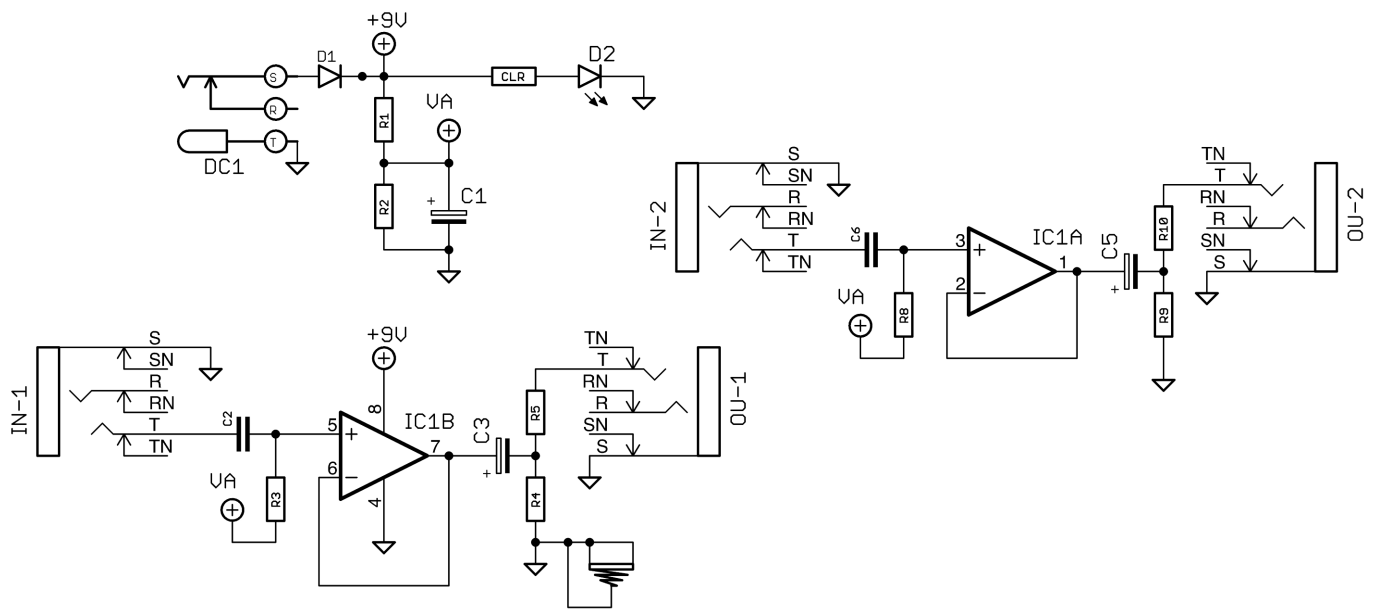

R1	100K	C1	47u elec	D1	1N5817
R2	100K	C2	100n	D2	LED*
R3	1M	C3	1u elec	IC1	TL072
R4	100K	C5	1u elec		
R5	560R	C6	100n		
R8	1M				Spring Thing is a Keystone 629
R9	100K				
R10	560R				
CLR	2K2*				*Optional

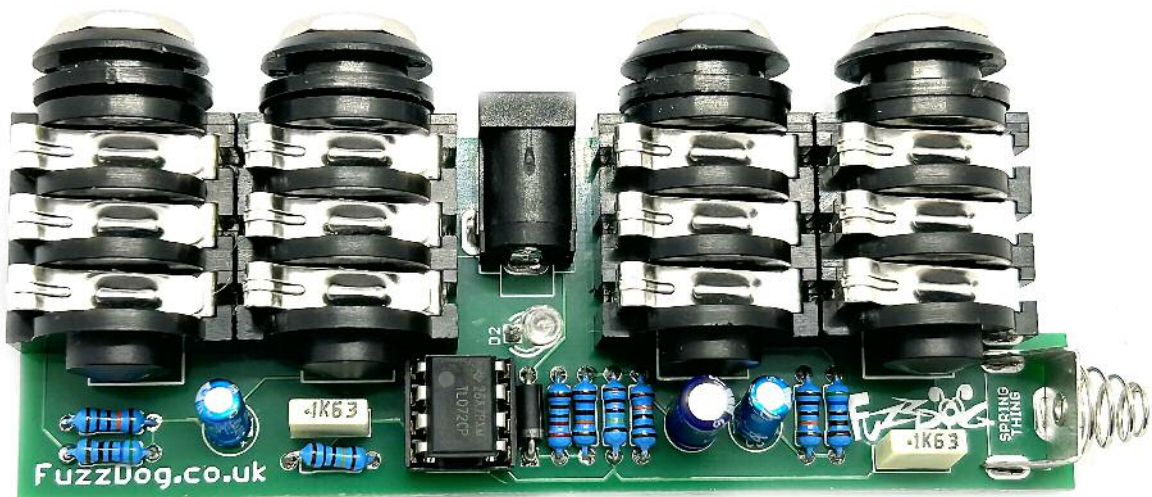

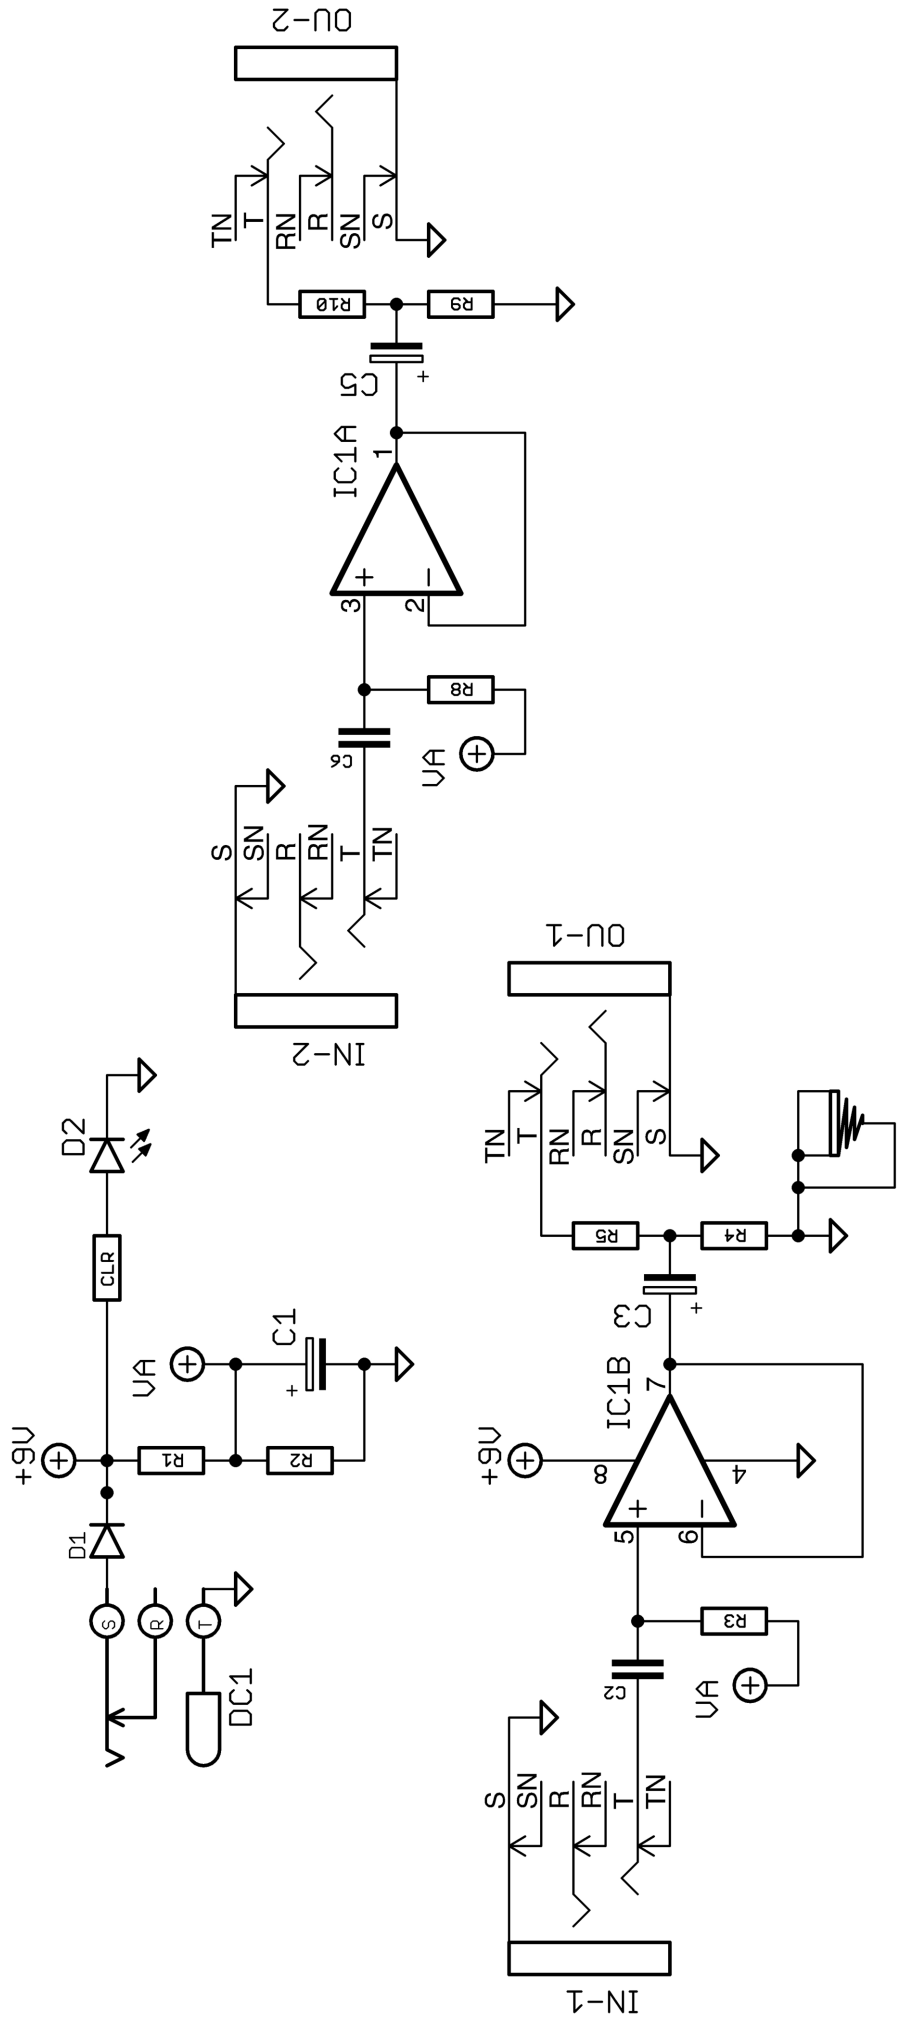

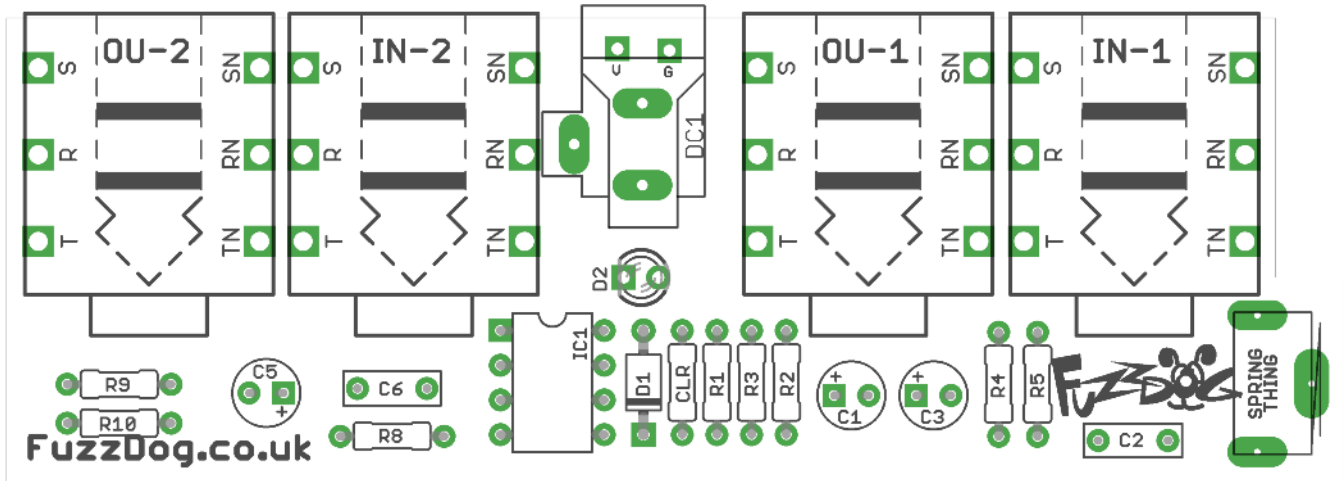

Not much to it.

Make sure your jacks and DC are all firmly down onto the PCB. If they aren't aligned properly you'll have trouble getting them in the enclosure.

If you'd prefer a wired DC socket simply wire the lugs to the V and G pads.

GROUNDING

The 'Spring Thing' grounds the circuit to the enclosure.




Drilling template

Hammond 1590B - 60 x 111 x 31mm

Drill sizes:

DC	10mm
Jacks	12mm

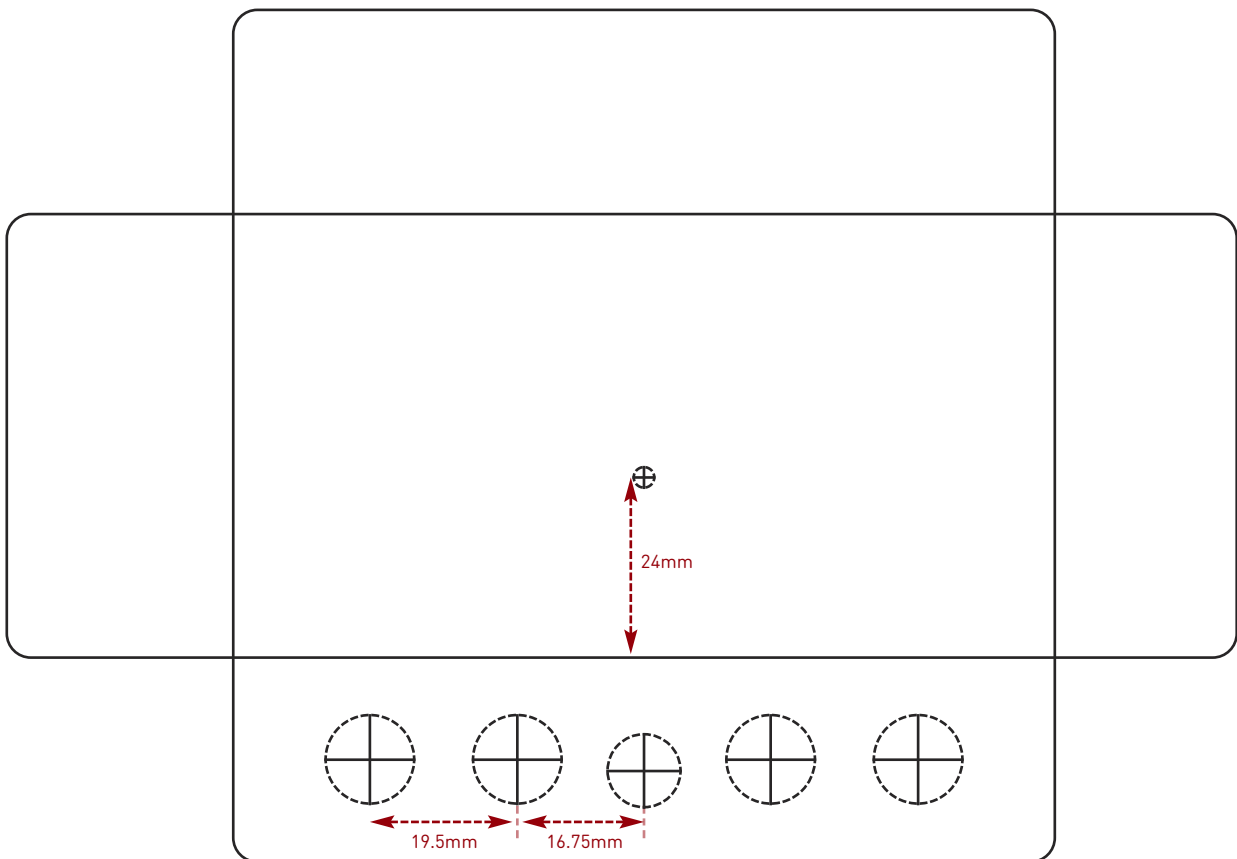

This template is a rough guide only. You should ensure correct marking of your enclosure before drilling. You use this template at your own risk. Pedal Parts Ltd can accept no responsibility for incorrect drilling of enclosures.

FuzzDog.co.uk