



# EPic Boost v2

Boost designed to sound like the pre-amp in an EP-3

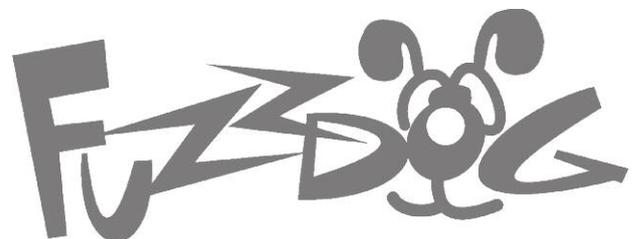

# Schematic + BOM

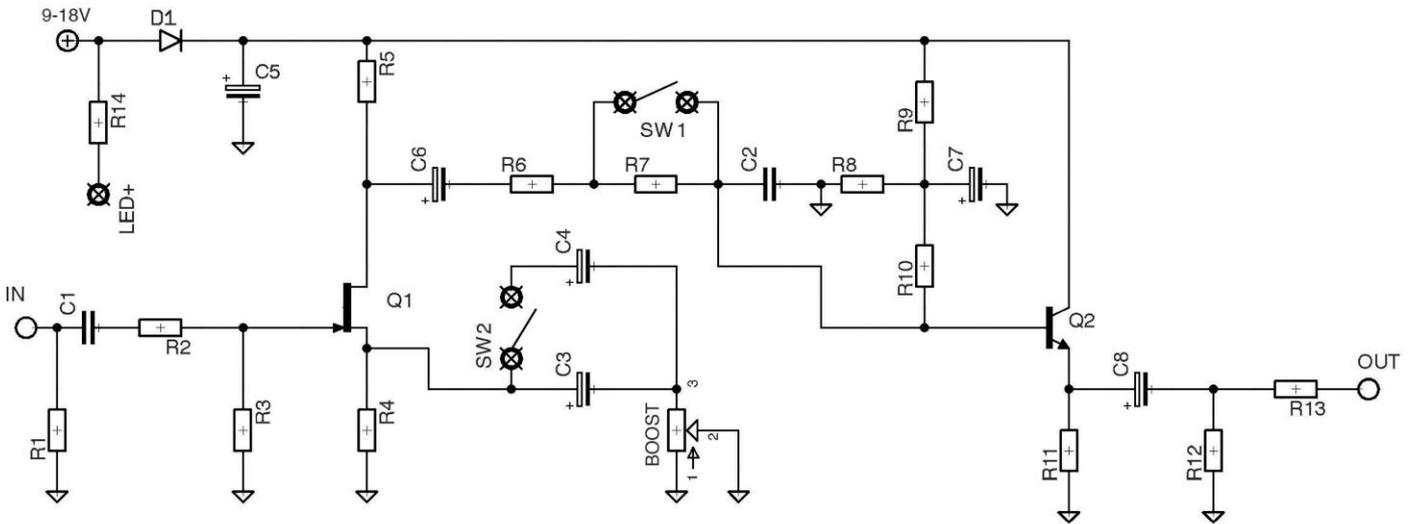


R1	1M	C1	47n	D1	1N4148
R2	33K	C2	3n3	Q1	2N5457
R3	1M	C3	10u elec	Q2	2N3904**
R4	4K7	C4	100u elec	BOOST	10KC***
R5	8K2	C5	47u elec	SW1‡	SPDT (ON-ON)
R6	1K	C6	10u elec	SW2‡	SPDT (ON-ON)
R7	15K	C7	10u elec	DIP1‡	4-PIN, 2 WAY DIL
R8	10K	C8	10u elec		
R9	10K				
R10	1M				
R11	10K				
R12	47K				
R13	100R				
R14	2K2 (CLR)*				

\* Increase R14 if using 18V supply - 4K7 will do it

\*\* Original uses 2SC1815. Using the 2N3904 does not alter the tone.  
If using 2SC1815 note the different pinout.

\*\*\* 10KB will do, but the sweep is better with reverse-log.

‡ Use EITHER toggle switches or a 2-way DIP switch, not both.

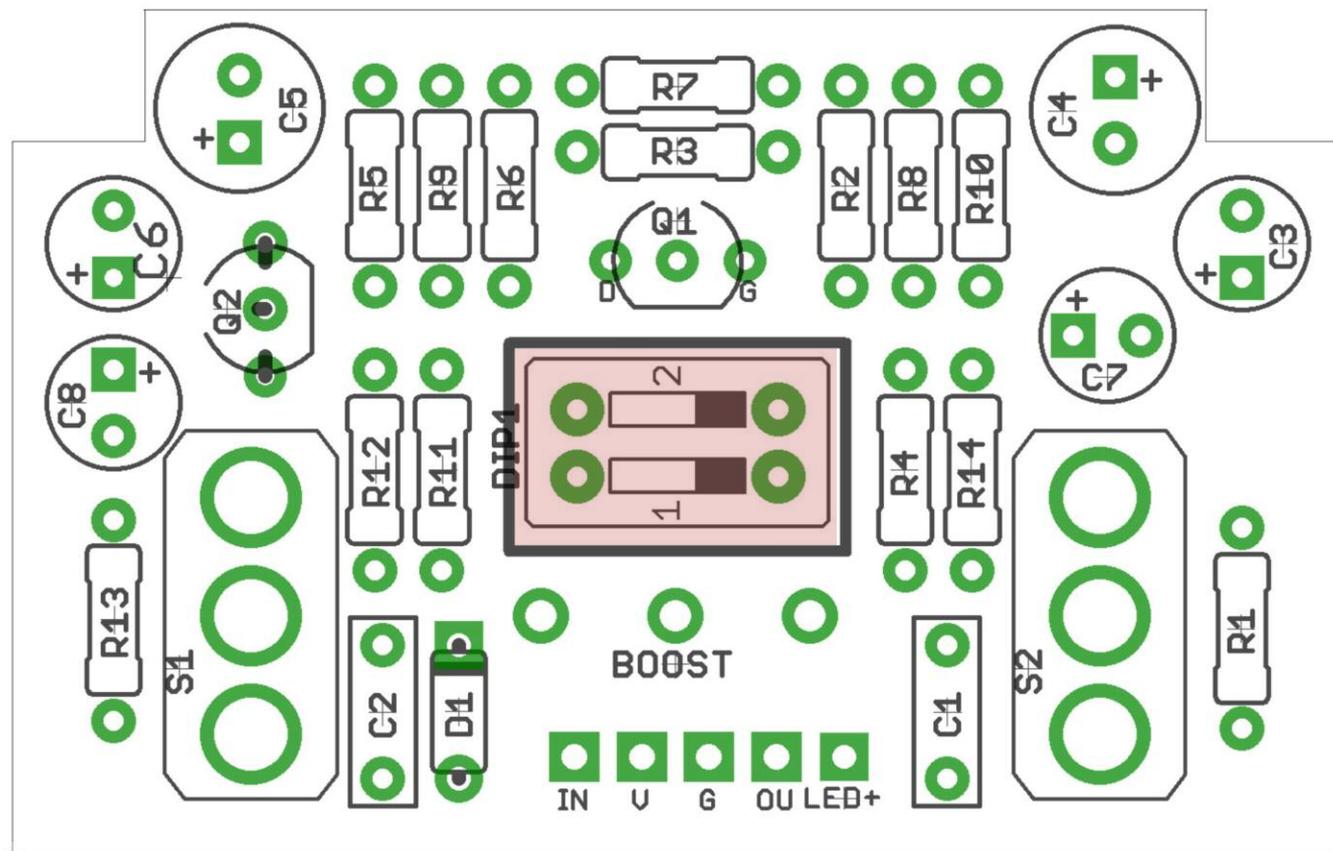

The power and signal pads on the PCB conform to the FuzzDog Direct Connection format, so can be paired with the appropriate daughterboard for quick and easy offboard wiring. Check the separate daughterboard document for details.

Be very careful when soldering the diode and transistor. They're very sensitive to heat. You should use some kind of heat sink (crocodile clip or reverse action tweezers) on each leg as you solder them. Keep exposure to heat to a minimum (under 2 seconds).

Snap the small metal tag off the pot so it can be mounted flush in the box.

Positive (anode) legs of the electrolytic caps go to the square pads. C4 and C5 can be bent back over the adjacent resistors to save on height - see the cover image.

Negative (cathode) leg of the diode goes to the square pads.


You should solder all other board-mounted components before you solder the pot. Once they're in place you'll have no access to much of the board.

## SWITCHES


You can use **EITHER** DIP switches in the pads marked in red above, or SW1 and SW2. You can't use both

**NOTE:** The effect of the switches is subtle. You may not notice much difference unless you have a cranked amp.

Pic shows the pot attached using header pins - we didn't have any vertical pin C10K pots when we first got the PCBs. Works just as well.

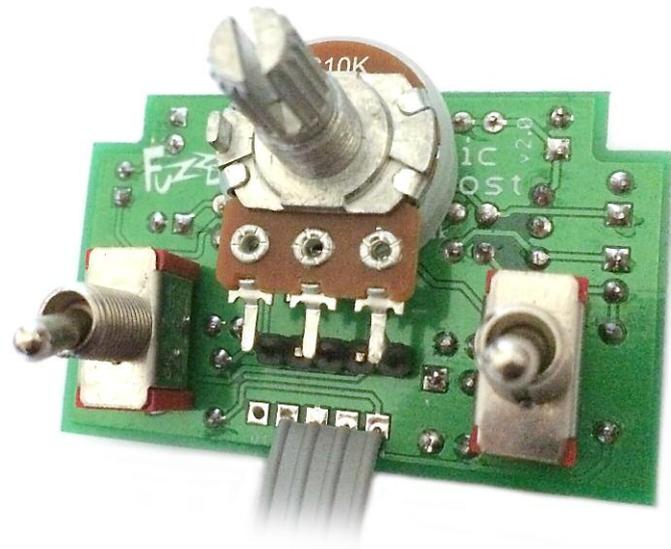

# Test the board!

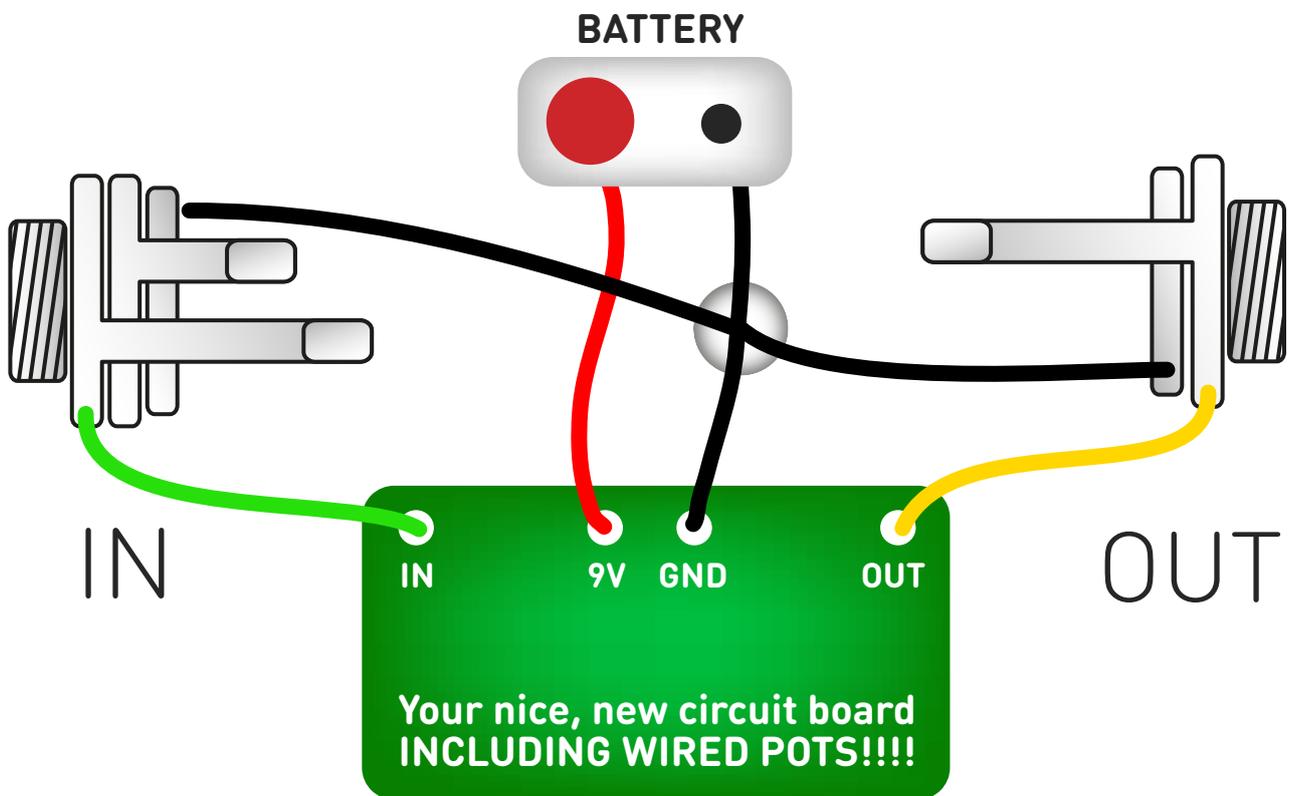


**UNDER NO CIRCUMSTANCES will troubleshooting help be offered if you have skipped this stage. No exceptions.**

Once you've finished the circuit it makes sense to test it before starting on the switch and LED wiring. It'll cut down troubleshooting time in the long run. If the circuit works at this stage, but it doesn't once you wire up the switch - guess what? You've probably made a mistake with the switch.

Solder some nice, long lengths of wire to the board connections for 9V, GND, IN and OUT. Connect IN and OUT to the jacks as shown. Connect all the GNDs together (twist them up and add a small amount of solder to tack it). Connect the battery + lead to the 9V wire, same method. Plug in. Go!

If it works, crack on and do your switch wiring. If not... aw man. At least you know the problem is with the circuit. Find out why, get it working, THEN worry about the switch etc.

# Wire it up (if using a daughterboard please refer to the relevant document)

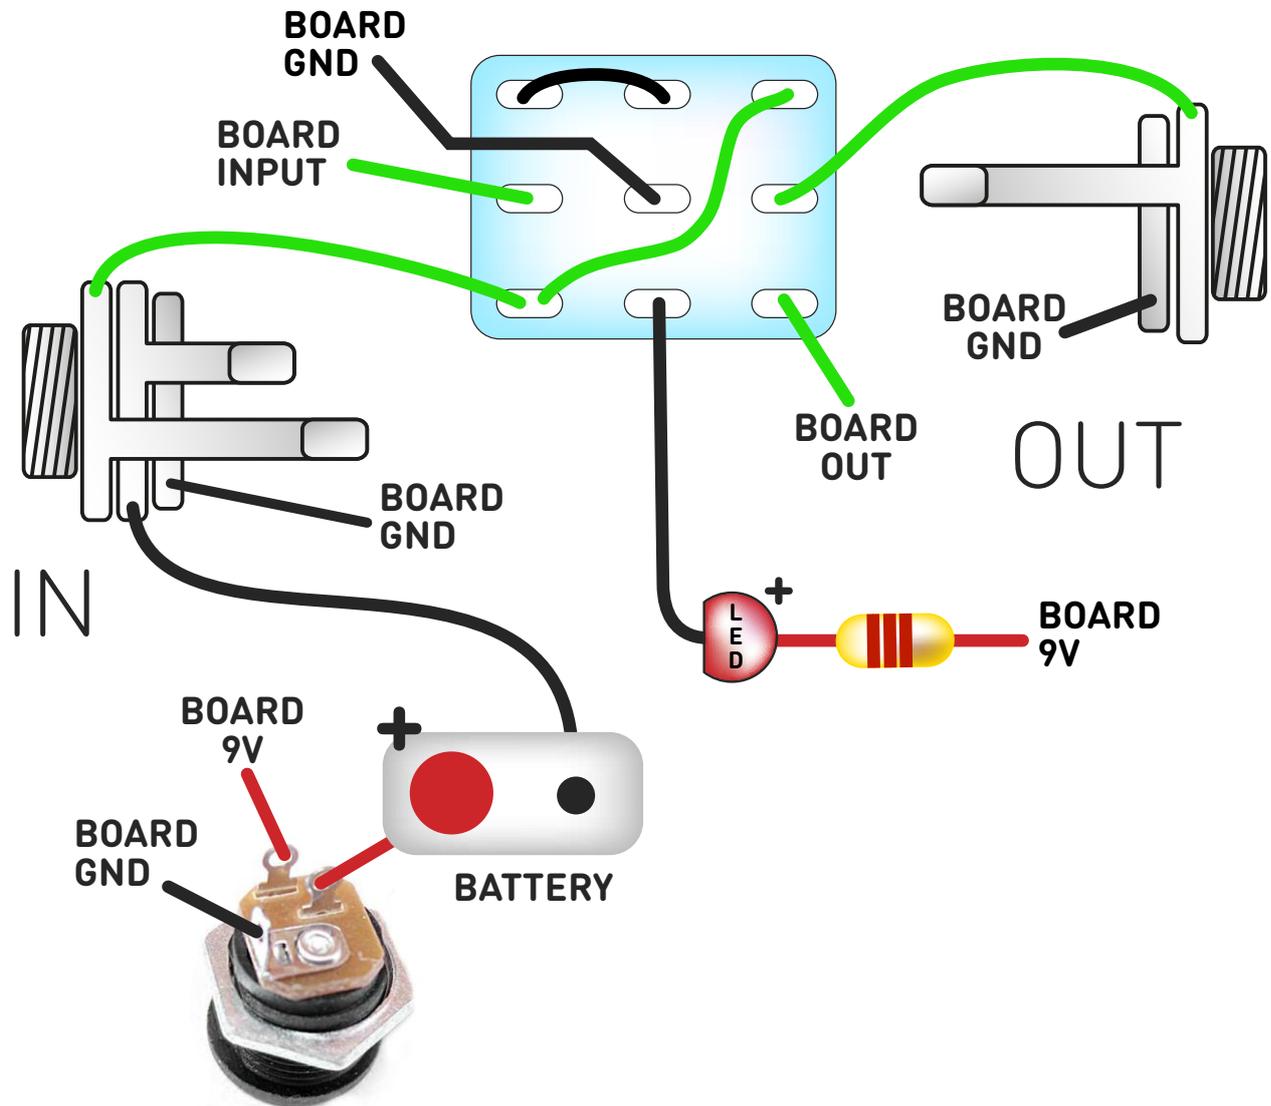

Wiring shown above will disconnect the battery when you remove the jack plug from the input, and also when a DC plug is inserted.

The Board GND connections don't all have to directly attach to the board. You can run a couple of wires from the DC connector, one to the board, another to the IN jack, then daisy chain that over to the OUT jack.

It doesn't matter how they all connect, as long as they do.

This circuit is standard, Negative GND. Your power supply should be Tip Negative / Sleeve Positive. That's the same as your standard pedals (Boss etc), and you can safely daisy-chain your supply to this pedal.


# Drilling template

Hammond 1590B  
60 x 111 x 31mm

Recommended drill sizes:

Pots	7mm
Jacks	10mm
Footswitch	12mm
DC Socket	12mm
Toggle switch	6mm

It's a good idea to drill the pot and toggle switch holes 1mm bigger if you're board-mounting them.  
Wiggle room = good!

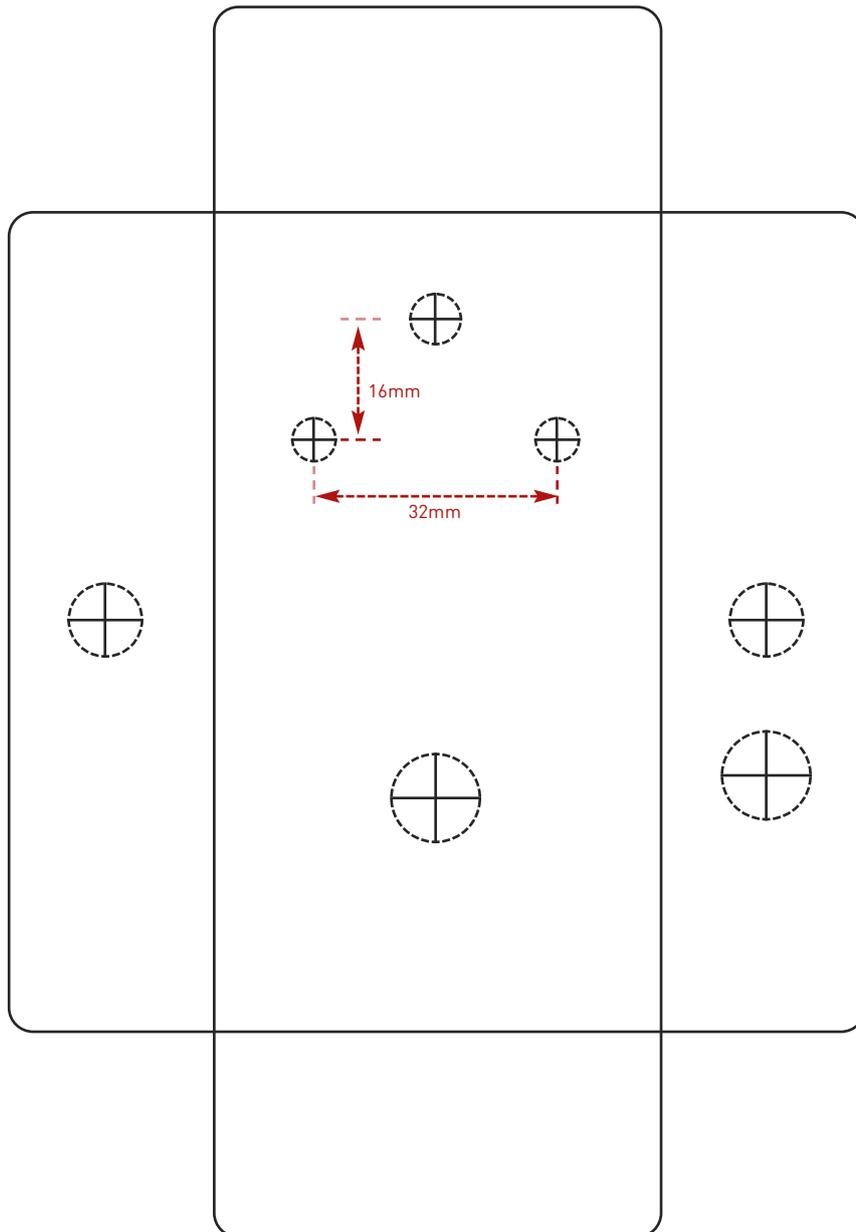

This template is a rough guide only. You should ensure correct marking of your enclosure before drilling. You use this template at your own risk. Pedal Parts Ltd can accept no responsibility for incorrect drilling of enclosures.

**FuzzDog.co.uk**