




# Plexi

Marshall tone in a purple box



# Schematic + BOM

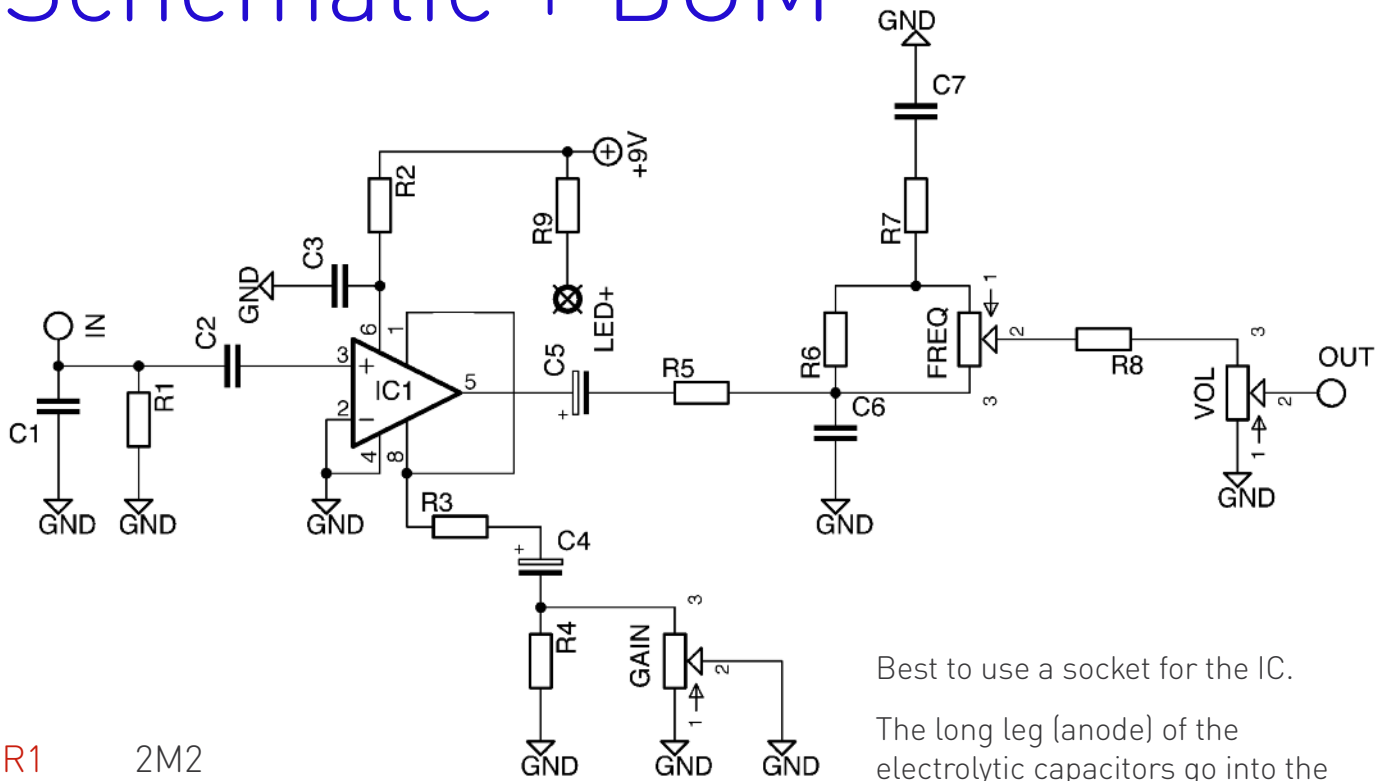

R1	2M2
R2	10R
R3	10R
R4	470R
R5	4K7
R6	4K7
R7	1K8
R8	330R
R9	2K2
GAIN	1KB
FREQ	5KB
VOL	100KB

C1	390p
C2	4n7
C3	100n
C4	47u
C5	47u
C6	4n7
C7	100n
IC	LM386


Best to use a socket for the IC.

The long leg (anode) of the electrolytic capacitors go into the square pads.


Pots mount on both sides of the PCB. VOL and GAIN on the back side of the board, FREQ on the same side as the other components.

Snap the small metal tag off the pots so they can be mounted flush in the box.

Be aware the GAIN control is all but useless. It's pretty much all or nothing. Blame the designer.

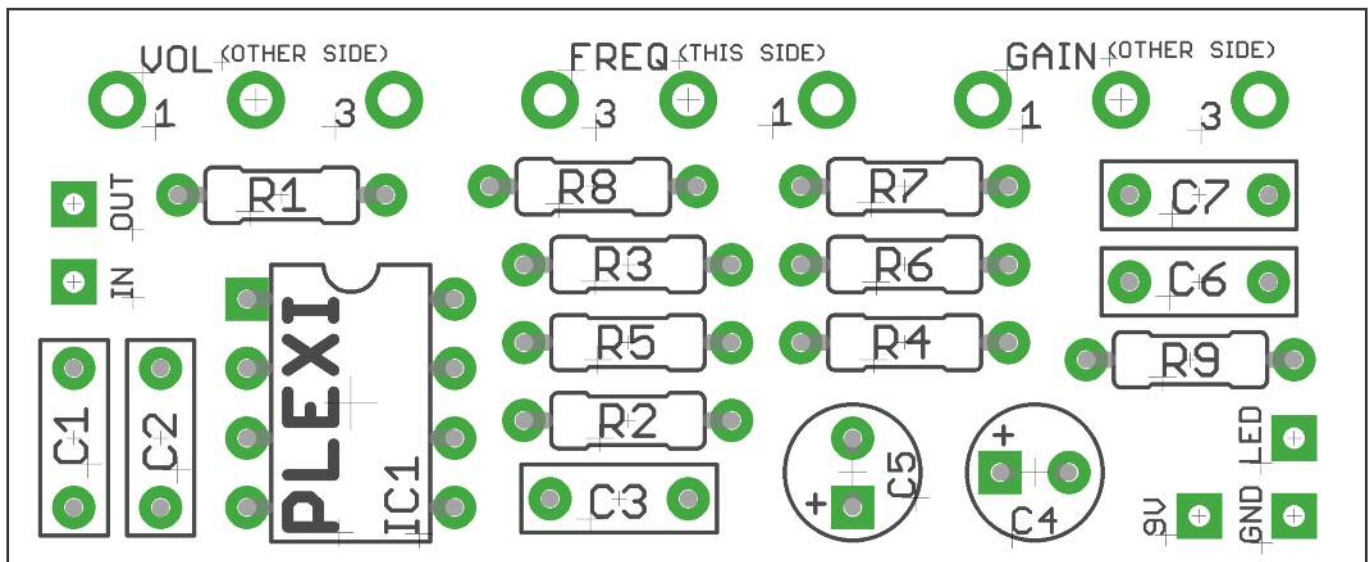

# Test the board!

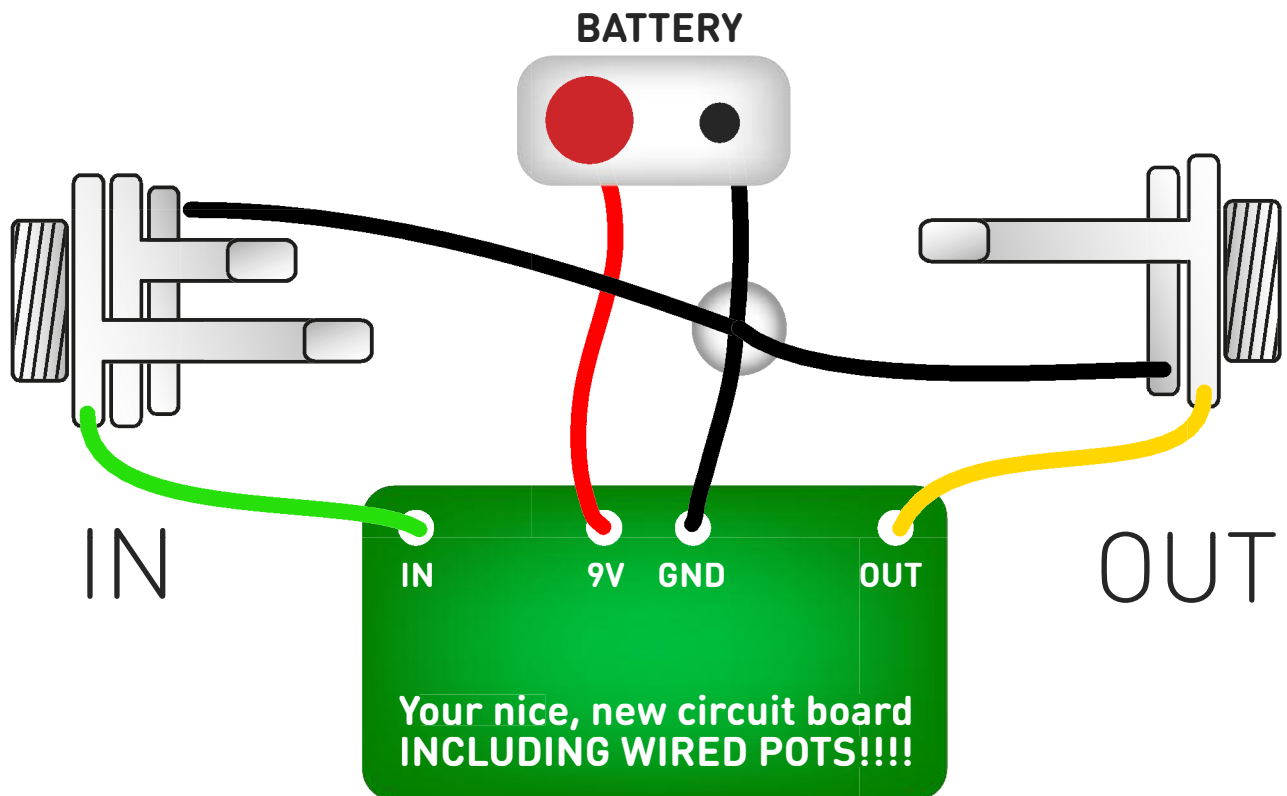

**UNDER NO CIRCUMSTANCES** will troubleshooting help be offered if you have skipped this stage. No exceptions.

Once you've finished the circuit it makes sense to test is before starting on the switch and LED wiring. It'll cut down troubleshooting time in the long run. If the circuit works at this stage, but it doesn't once you wire up the switch - guess what? You've probably made a mistake with the switch.


Solder some nice, long lengths of wire to the board connections for 9V, GND, IN and OUT. Connect IN and OUT to the jacks as shown. Connect all the GNDs together (twist them up and add a small amount of solder to tack it). Connect the battery + lead to the 9V wire, same method. Plug in. Go!

If it works, crack on and do your switch wiring. If not... aw man.

At least you know the problem is with the circuit. Find out why, get it working, THEN worry about the switch etc.

# Wire it up - with battery

(if using a daughterboard please refer to the relevant document)

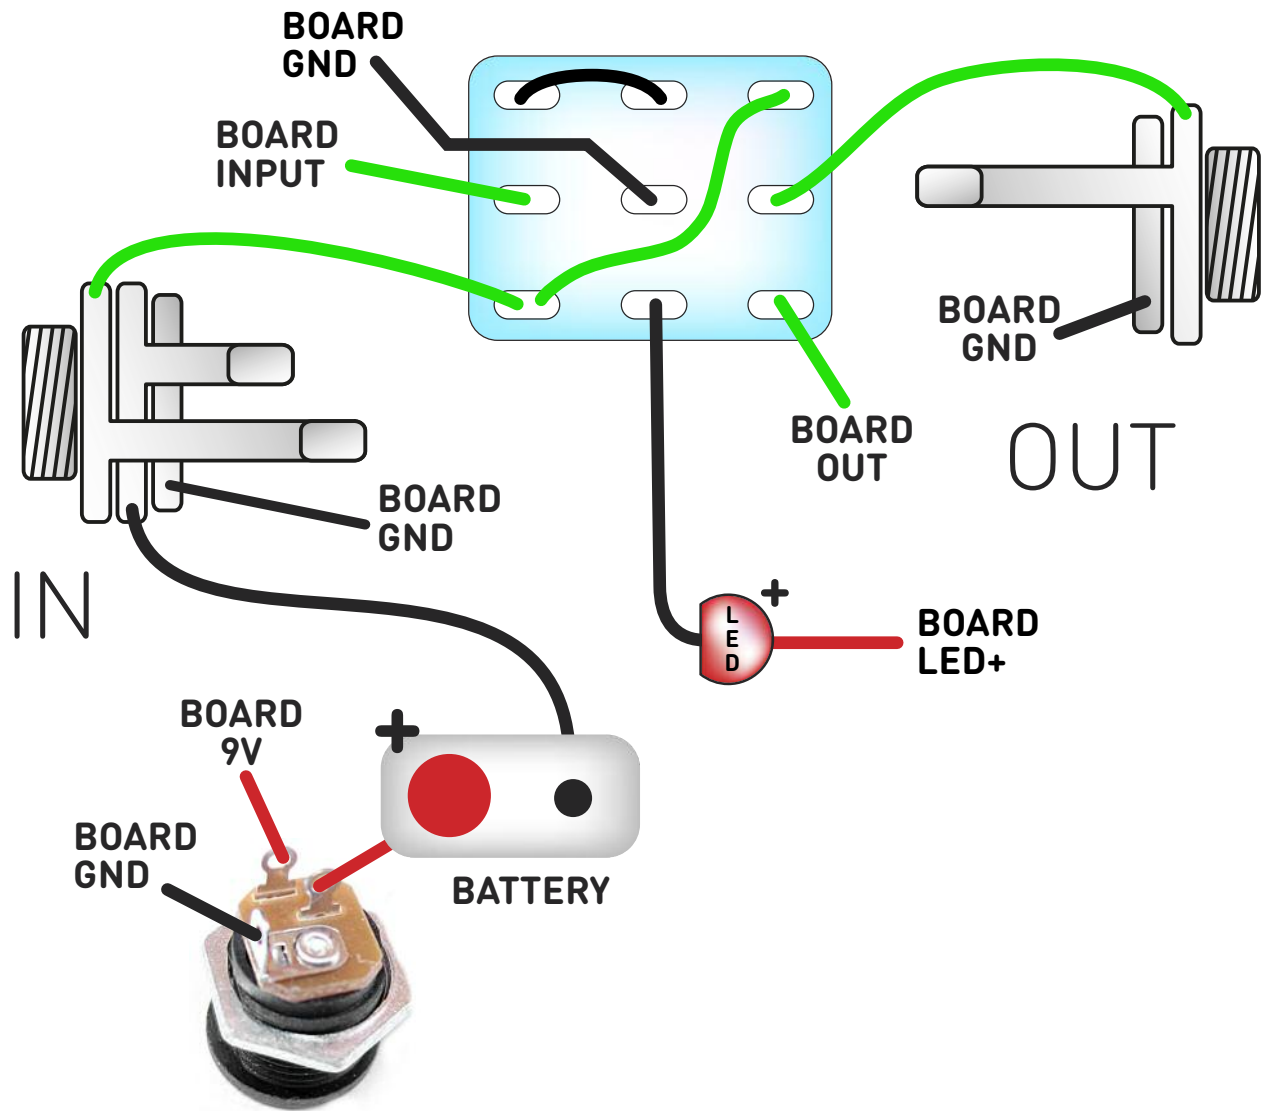


This circuit is standard, Negative GND. Your power supply should be Tip Negative / Sleeve Positive. That's the same as your standard pedals (Boss etc), and you can safely daisy-chain your supply to this pedal.

The BOARD GND connections don't all have to connect to one point. They can be daisy-chained around the circuit, using larger connection points (such as jack socket lugs) for multiple connections. As long as they all connect together in some way.

# Wire it up - DC only version

(if using a daughterboard please refer to the relevant document)

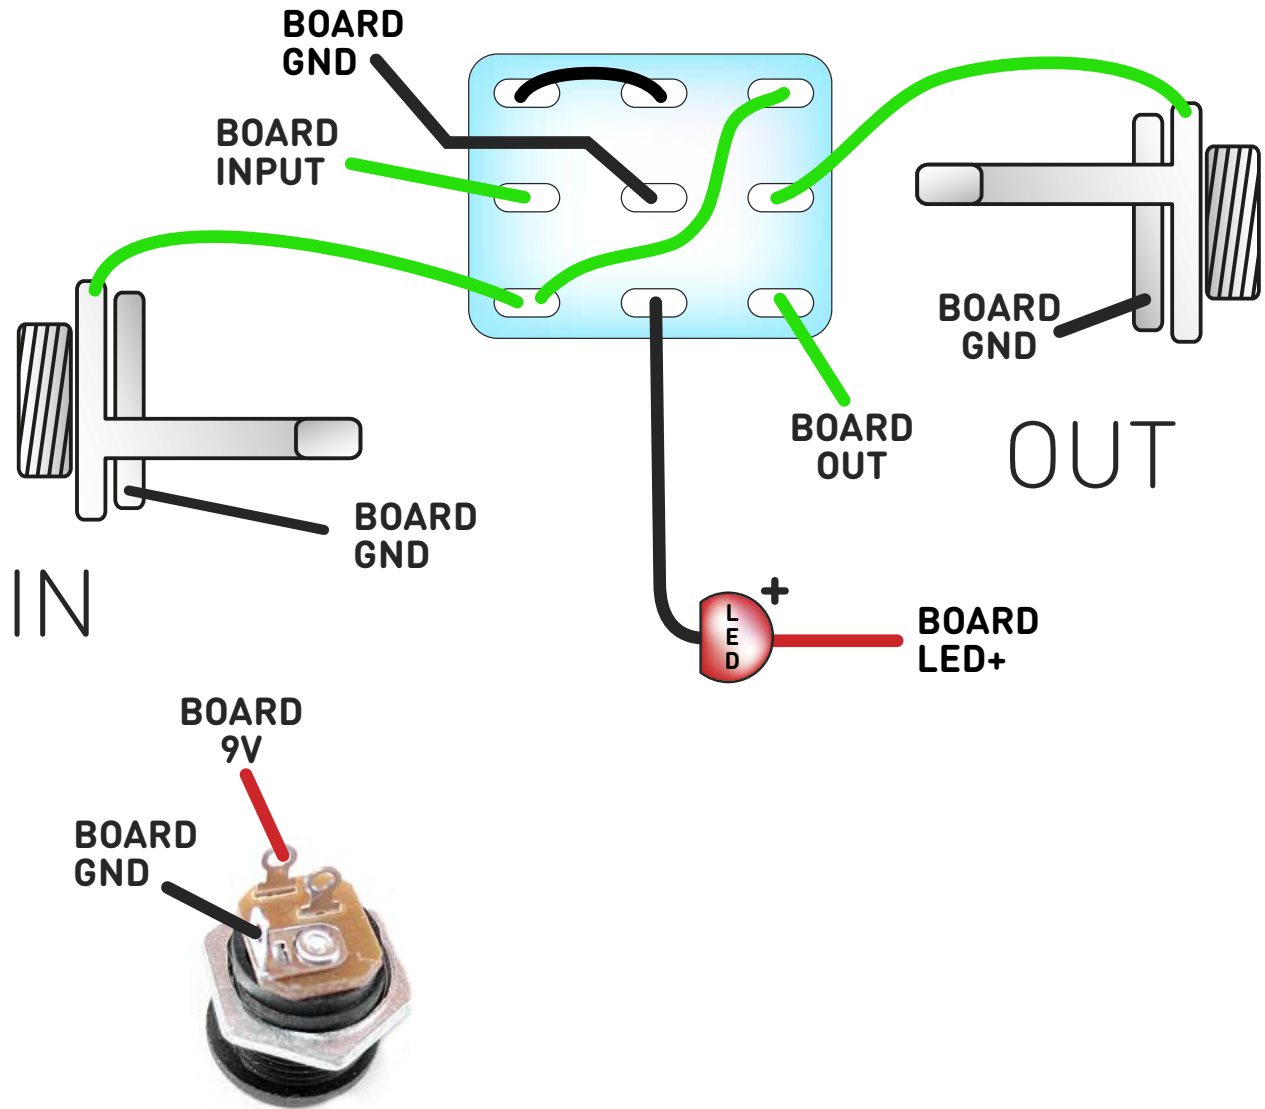

This circuit is standard, Negative GND. Your power supply should be Tip Negative / Sleeve Positive. That's the same as your standard pedals (Boss etc), and you can safely daisy-chain your supply to this pedal.

The BOARD GND connections don't all have to connect to one point. They can be daisy-chained around the circuit, using larger connection points (such as jack socket lugs) for multiple connections. As long as they all connect together in some way.

# Drilling template


Recommended drill sizes:

Pots	7mm
Jacks	10mm
Footswitch	12mm
DC Socket	12mm

Hammond 1590B

60 x 111 x 31mm

It's a good idea to drill the holes for the pots 8mm to give yourself some wiggle room unless you're a drill ninja

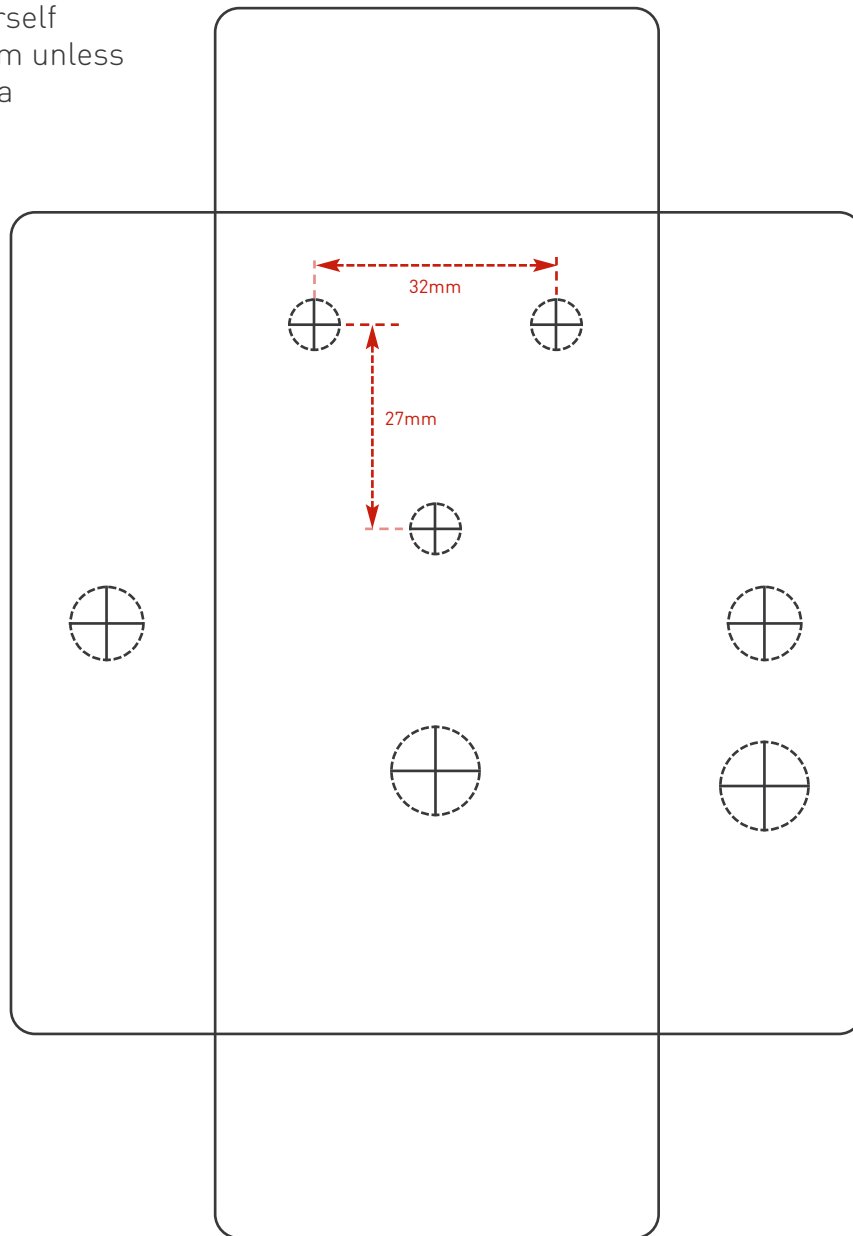

This template is a rough guide only. You should ensure correct marking of your enclosure before drilling. You use this template at your own risk.

Pedal Parts Ltd can accept no responsibility for incorrect drilling of enclosures.

[PedalParts.co.uk](http://PedalParts.co.uk)