



FuzzRite

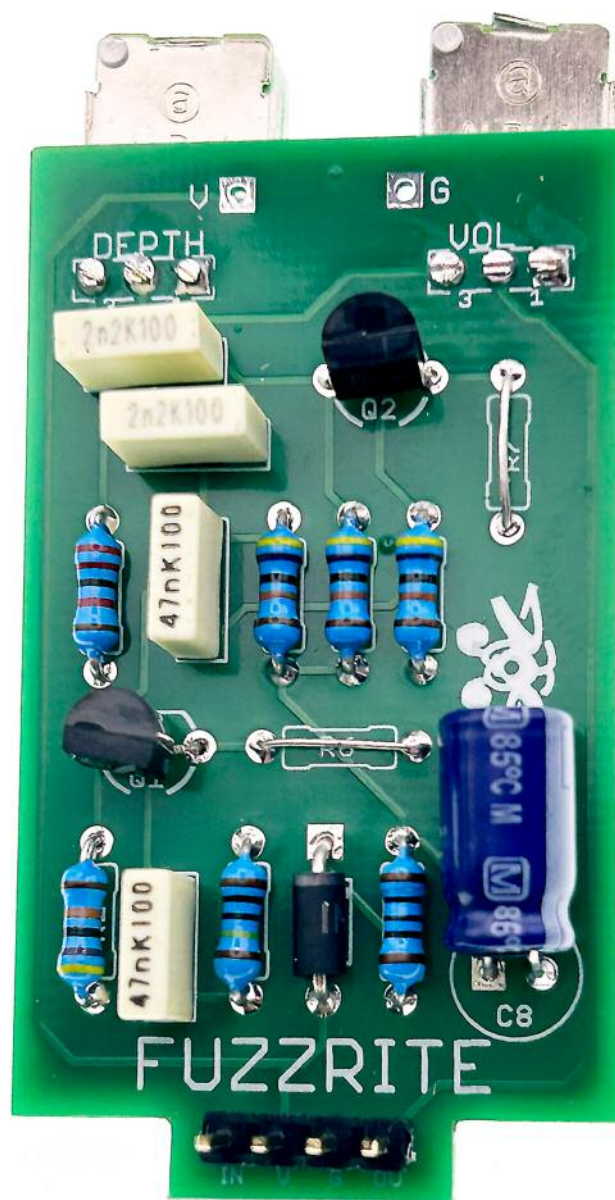

FuzzRite

Mosrite FuzzRite /
Gus' Rite Fuzz

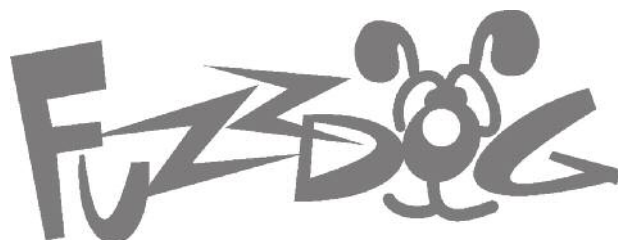

IMPORTANT

Before you start...

Grab the general build doc that covers all FuzzPup V2 builds.
Most of the information you need for this build is in there.

Read it? OK, carry on.




FuzzPups v2

Lovely little boxes of joy with a
standardised build pattern

Contents of this document are ©2022 Pedal Parts Ltd.
No reproduction permitted without the express written
permission of Pedal Parts Ltd. All rights reserved.



Schematic + BOM

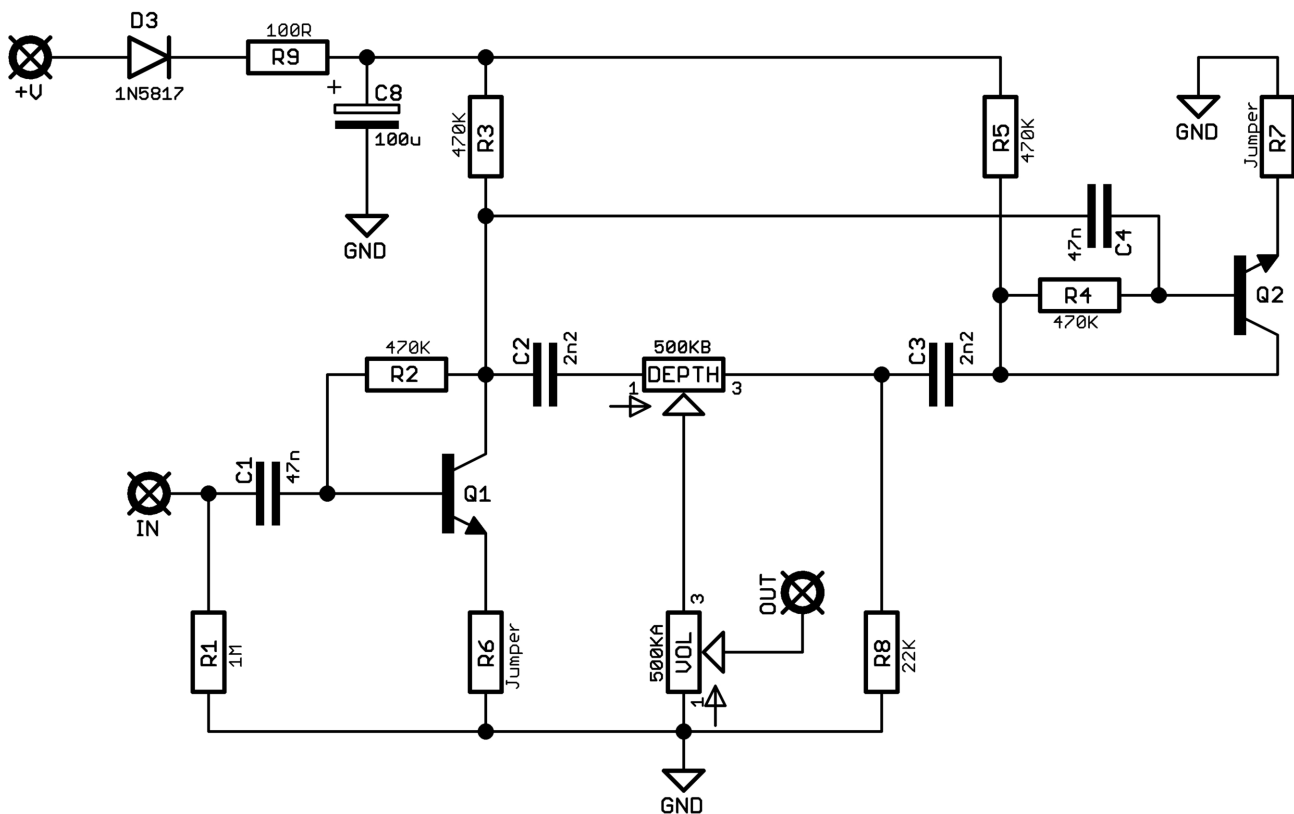



R1	1M	C1	47n (100n)	D1	1N5817
R2	470K	C2	2n2 (100n)	Q1-2	* (2N3904)
R3	470K (10K)	C3	2n2 (100n)	DEP	500KB (100KB)
R4	470K	C4	47n (100n)	VOL	500KA (100KA)
R5	470K (10K)	C8	100u elec		
R6	Jumper (100R)				
R7	Jumper (100R)				
R8	22K				
R9	100R				

Parts in blue are for Gus' Rite Fuzz, a fatter affair that doesn't sound a lot like a Fuzz Rite, but to each their own.

*You can try anything you feel like for Q1-2.


We like BC337-16. These need to be reversed compared to the PCB silkscreen, as shown on the cover image. Your usual suspects such as 2N5088, 2N3904 should be placed as per the silkscreen.

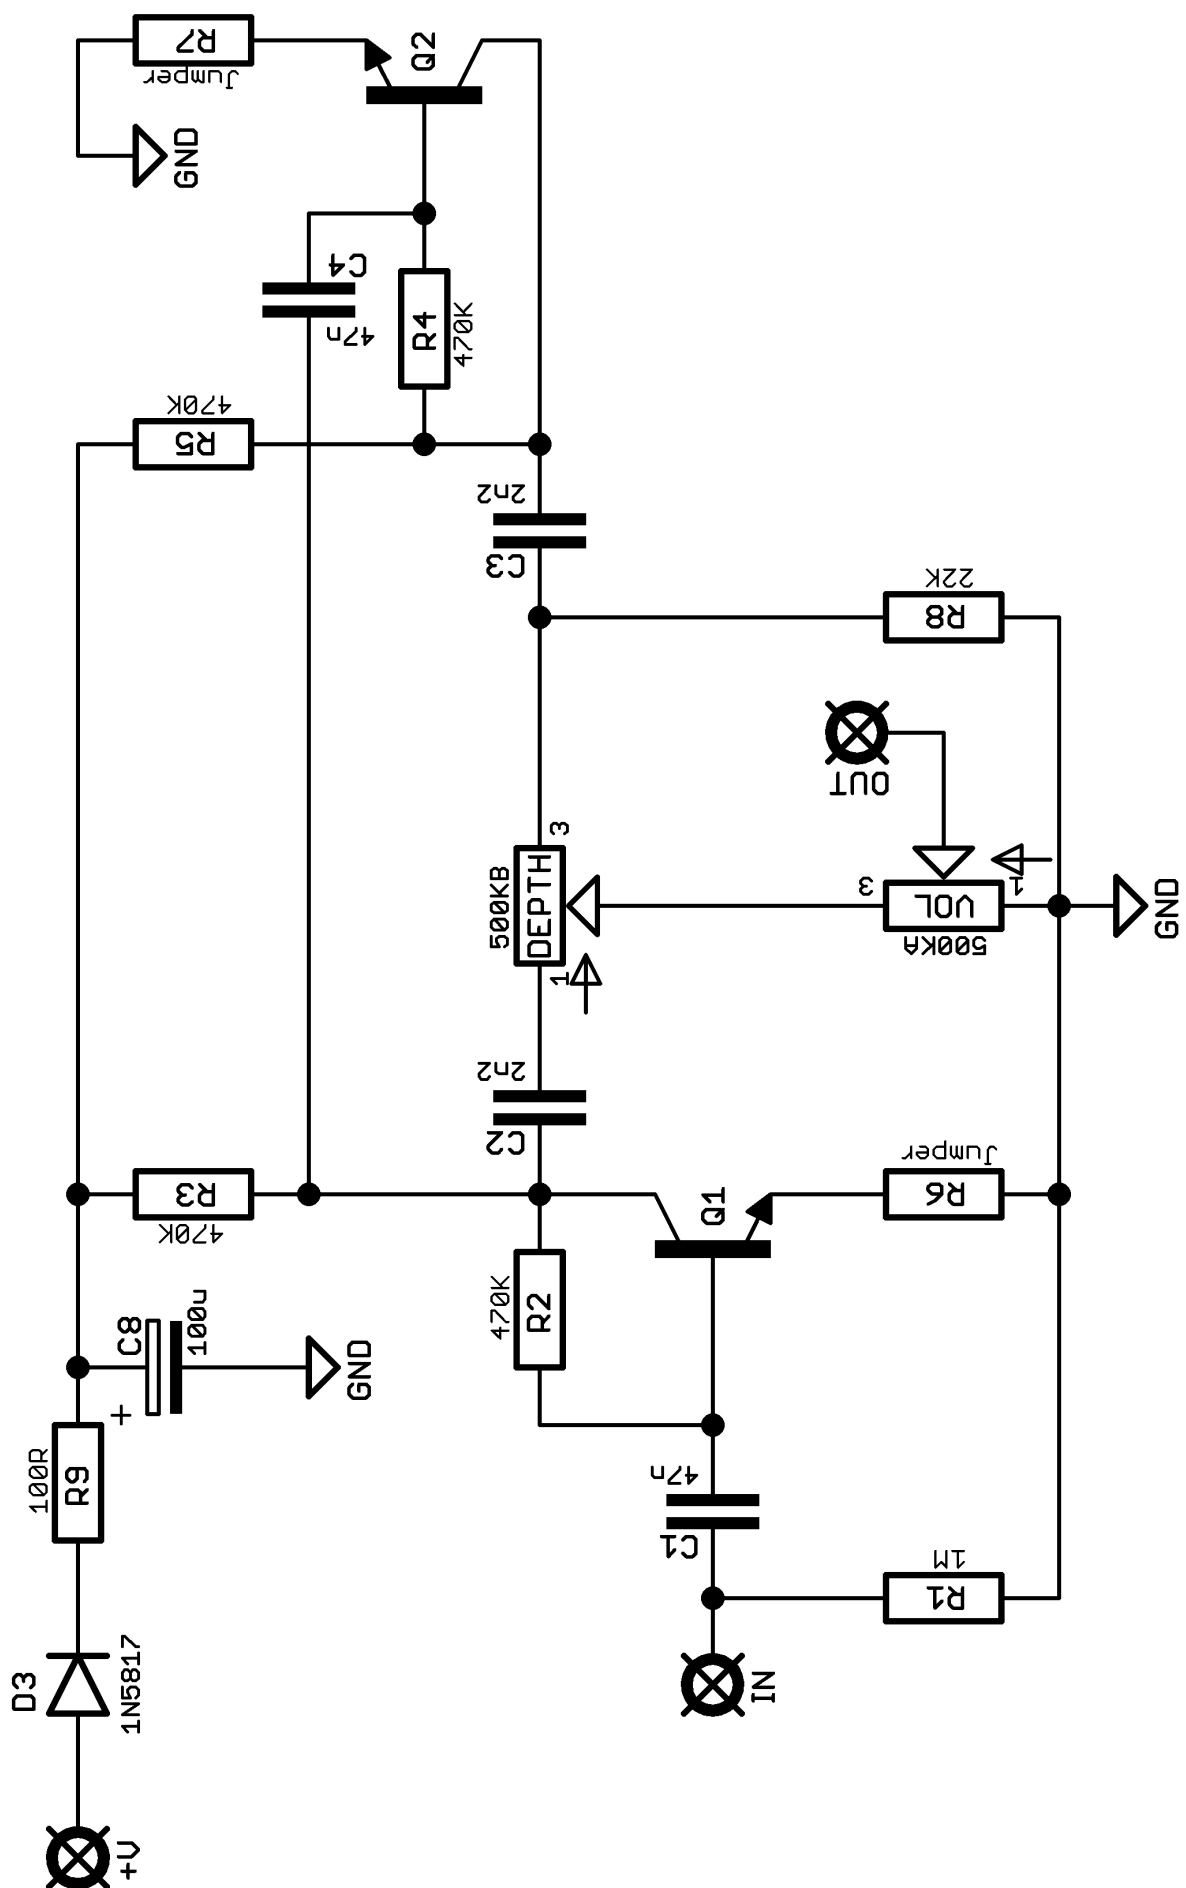

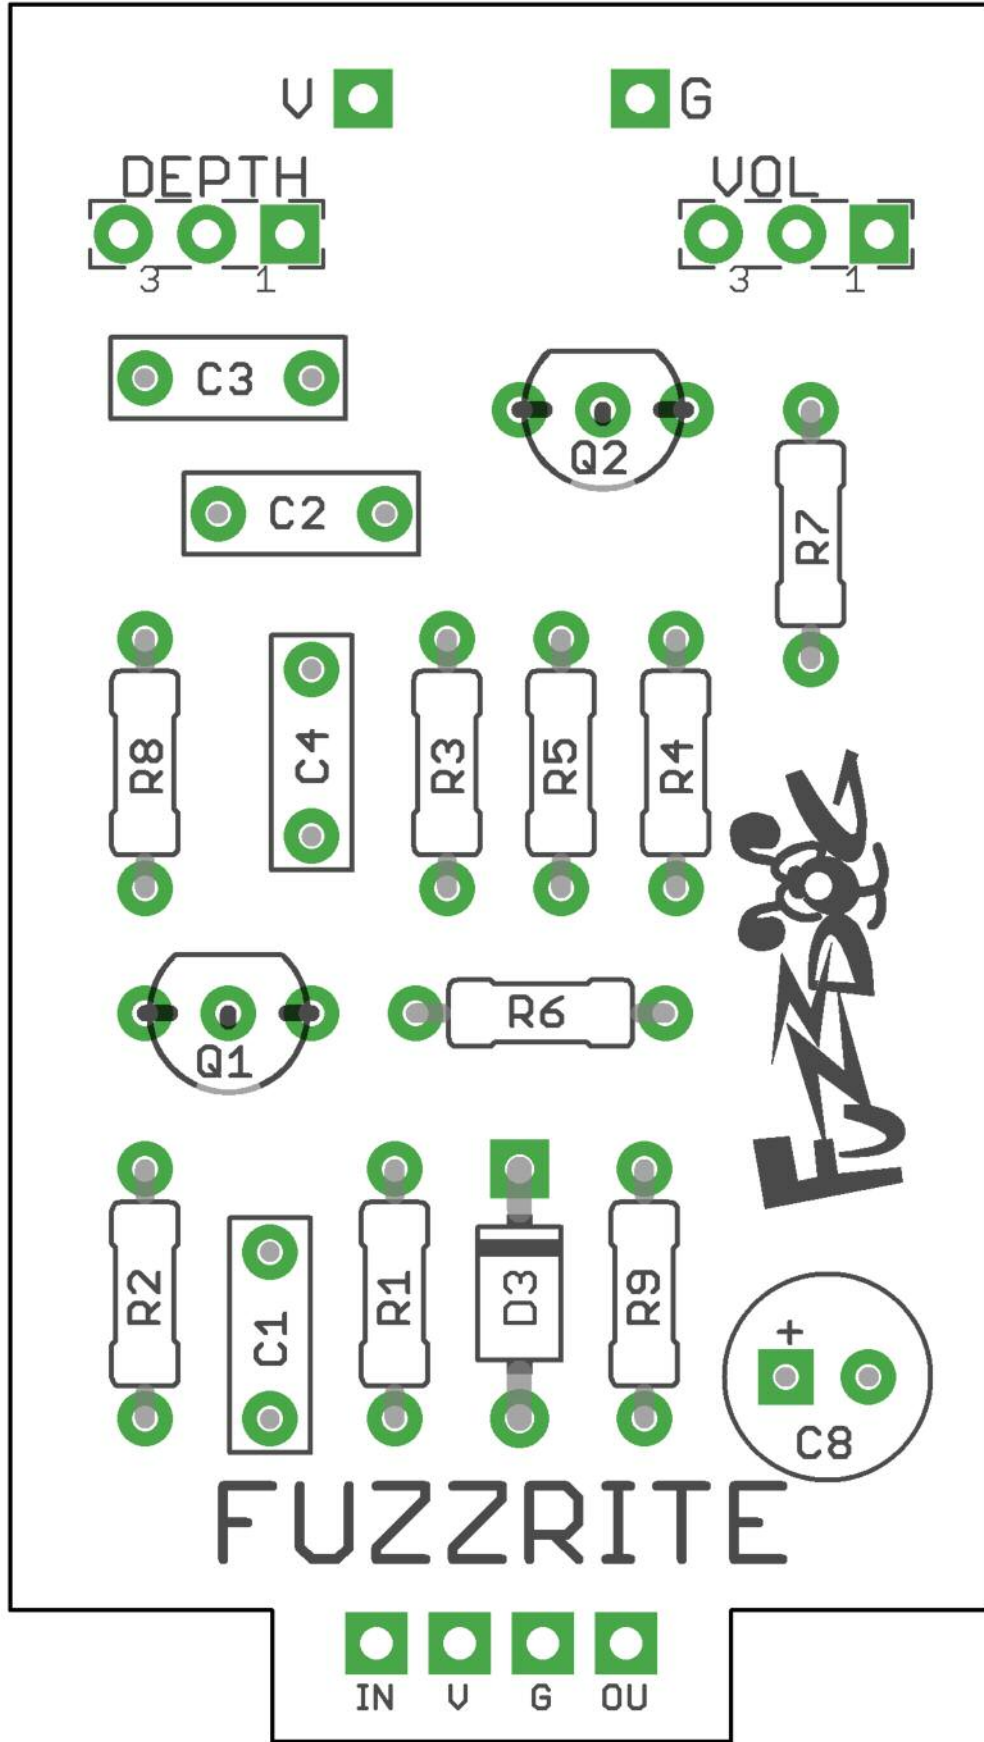

Everything else you need is in the
general build doc you've already read.

Head back to that.

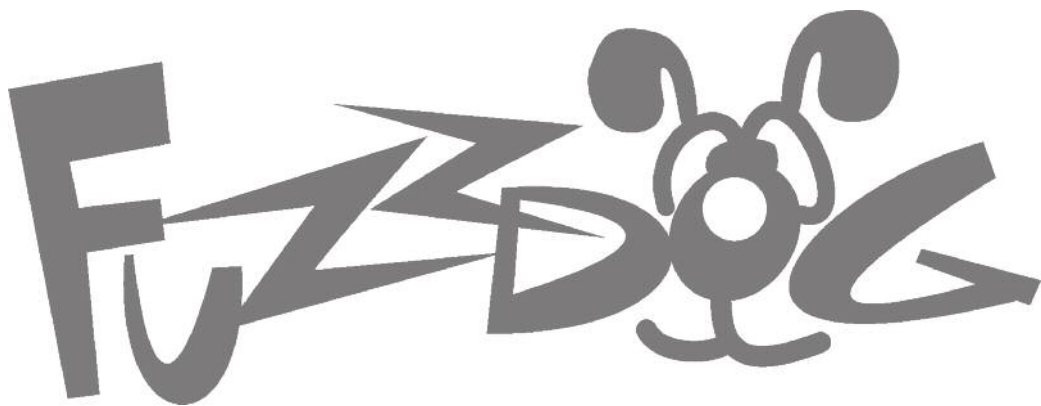

FuzzDog.co.uk